

AVN211




H.264 Network Camera



FEATURES

- Low-latency video streaming with H.264 compression format for sharp and clear images
- Hybrid digital / analog video output
- It is friendly to use by wizard with browser
- Motion detection
- Complete IP surveillance system, such as the Central Management System (CMS) software, Network-Attached Storage (NAS), Network Video Recorder (NVR), etc.

DIMENSIONS

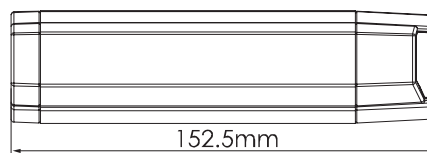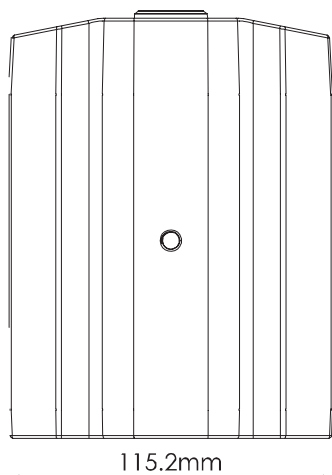

SPECIFICATIONS

| MODEL | AVN211 |
|-----------------------------------|---|
| Network | |
| LAN Port | YES |
| LAN Speed | 10/100 Based-T Ethernet |
| Supported Protocols | DDNS, PPPoE, DHCP, NTP, SNTP, TCP/IP, ICMP, SMTP, FTP, HTTP, RTP, RTSP |
| Frame Rate | NTSC:30, PAL:25 |
| Number of Online Users | 30 |
| Security | Multiple user access levels with password |
| Web management software | YES (Control up to 16 network cameras simultaneously) |
| Video | |
| Video Compression | H.264 / MPEG4 / MJPEG |
| Video Remote Control | YES |
| Video Adjustment | Brightness, Contrast, Saturation and Hue |
| Mobile | Supports 3GPP mobile surveillance |
| Camera | |
| Image Sensor | 1/3" H.R. CCD image sensor |
| Pixels | 768(H) x 494(V) <NTSC> / 752(H) x 582(V) <PAL> |
| Lens | f4.6mm |
| F-number | F1.9 |
| Viewing Angle | 60° |
| Shutter Speed | 1 / 60 (1/50) to 1 / 100,000 sec. |
| Min Illumination | 1 Lux |
| Video Output | 1.0 Vp-p. 75Ω |
| BLC | AUTO |
| White Balance | ATW |
| Others | |
| Remote Control | YES |
| Motion Detection | YES |
| Power | DC12V, 0.5A |
| Operating Temperature | 0~40°C |
| Humidity | 85% |
| Minimum Web Browsing Requirements | <ul style="list-style-type: none"> • Pentium 4 CPU 1.3 GHz or higher, or equivalent AMD • 256 MB RAM • AGP graphics card, Direct Draw, 32MB RAM • Windows XP, Windows 2000 Server, ME, 98, DirectX 9.0 or later • Internet Explorer 6.x or later |
| Dimension (mm)** | 152.5(L) x 115.2(W) x 40.2(H) (6.00" x 4.54" x 1.58") |
| Shipping Weight | 812g (1.79 lbs) including mounting bracket and power supply |

* Specifications are subject to change without notice.

** Dimensional Tolerance: ± 5mm