



Basic 4 Channels - H.264 Realtime Video Recorder



DVR-4200-B

- » H.264 Compression (Main Profile)
- » 4 Channels Realtime Audio/Video Recording
- » Multiplex Performance
- » Advanced Client Monitoring System
- » 3G Mobile Viewer: iPhone®, BlackBerry®, Windows Mobile®, Android™ & Nokia® Symbian® Phones.
- » Support Internet Explorer, Mozilla Firefox, Safari and Google Chrome Browser.

B SERIES

H.264 REALTIME

Compact H.264 Realtime DVR



EASY TO USE
*Intuitive, Flexible,
User Friendly GUI*



MULTI-BROWSER
*Explorer, Mozilla Firefox,
Safari and Google Chrome*



VIDEO VIEWER
*Convenient and
Versatile Software*



POWERFUL SEARCH
*supported (Date, Time
& Event) and Backup*



MOBILE VIEWER
*Mobile Viewer on
Smart Phones*




AUTO RECOVERY
*System Auto Recovery
After Power Failure.*

TECHNICAL SPECIFICATIONS


| Model | DVR-4200-B |
|------------------------------|--|
| Video Compression | H.264 (Advanced Video Coding) |
| Video System | NTSC / PAL (Auto Detection) |
| Video Input | 4 BNC Video Input |
| Video Output | 1 BNC Video Output |
| VGA Output | 1 VGA Output (Resolution up to 1600 x 1200) |
| Video Adjustable | Hue / Saturation / Contrast / Brightness |
| Recording Mode | Manual / Timer / Event (Motion Detection) / Alarm / Remote |
| Recording Resolution (Frame) | 704 x 480 - 30 fps (NTSC) / 704 x 576 - 25 fps (PAL) |
| Recording Resolution (Field) | 704 x 240 - 60 fps (NTSC) / 704 x 288 - 50 fps (PAL) |
| Recording Resolution (CIF) | 352 x 240 - 120 fps (NTSC) / 352 x 288 - 100 fps (PAL) |
| Image Quality Setting | SUPER BEST / BEST / HIGH / NORMAL |
| Audio Input | 4 Inputs (RCA Jack) |
| Audio Output | 1 Output (RCA Jack Mono) |
| PTZ Control | Yes (EXTERNAL I/O: RS232 9 Pins Connector) |
| Alarm Input/Output | 4 Inputs / 1 Output |
| USB Ports / Data Backup | 2 USB 2.0 Ports for Mouse and Backup (Front Panel) |
| Picture Zoom | 2X Digital Zoom (Live Only) |
| Primary Storage | Serial-ATA Hard Drive Disc |
| Maximum Recording Capacity | 1 HDD (2 TB) |
| Power Supply | 19V DC ($\pm 10\%$) / 2.21A |

*Design and specifications are subject to change without notice

SYSTEM INTERCONNECTION

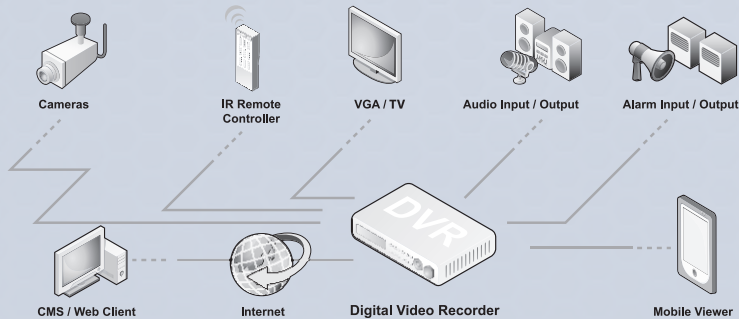

DIMENSIONS

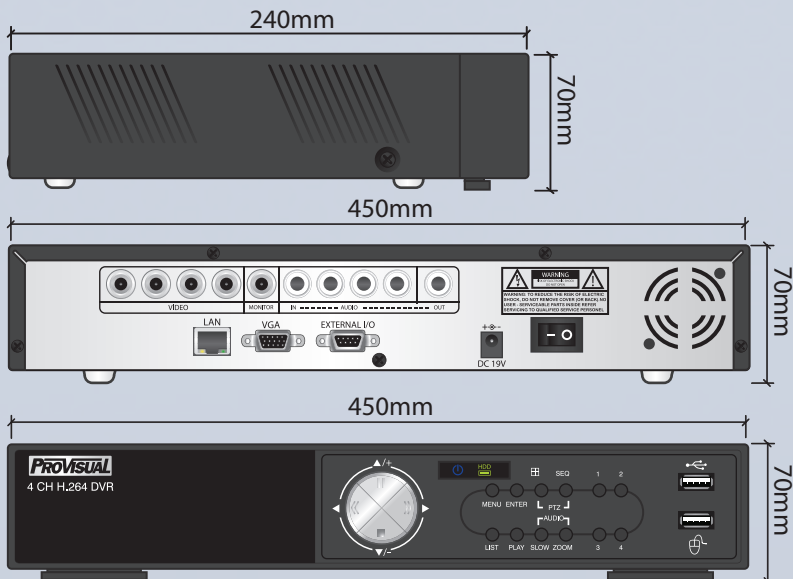

KEY FEATURES



USB Mouse Connection



Multi-Browser Viewing Support



Serial-ATA HDD Connection



E-Mail Notification



Audio Recording & Playback



Auto-Selectable VGA / BNC Video



Archiving (AVC Embed Player)



IR Remote Controller



Software Upgrade via Network, USB Port